



B4260M

Output Power 输出功率: 10W~40W

Weight 重量: 290g (Approx.)

Brushless DC Motor-Typical Application 直流无刷电机-典型应用

Automobile Parts: Pump, Fan, Actuator, Parking Heater

汽车部件: 泵, 风机, 致动器, 驻车加热器

Home Application: White Goods, Small Appliance, Fanner, Coffee Machine, Meat Grinder

家用电器: 白色家电, 小家电, 无风叶电风扇, 有风叶风扇, 咖啡机, 绞肉机

Medical Apparatus: Medical Pump, Surgery Tools, Medical Stirrer, Centrifugal Machine

医疗器械: 医疗泵, 手术器械, 搅拌机, 离心机

Business Equipment: Printer, Copier, Projector, ATM, Vending Machine

商业设备: 打印机, 复印机, 投影机, ATM机, 售卖机

Power Tools: Screwdriver, Drill, Air Compressor 电动工具: 电动螺丝批, 电钻, 气体压缩机

Personal Care: Hair Dryer, Massager, Vibrator 个人护理: 风筒, 按摩器, 震动器


Model 型号	Voltage(V) 电压		No Load 空载		Rated Load 额定负载				Stall 堵转	
	Operating Range	Rated	Speed (rpm)	Current (A)	Torque (mNm)	Speed (rpm)	Current (A)	Output P. (W)	Torque (mNm)	Current (A)
B4260M-S01	8-26	12	4590	0.28	45.00	3500	1.88	16.54	190.2	3.0
B4260M-S02	8-26	24	4260	0.26	95.06	3270	1.85	32.58	409.2	3.0
B4260M-S03	8-26	24	4046	0.24	60.04	3342	1.21	21.01	344.6	2.5

Characteristic: CW & CCW, Signal function available, Locked rotor protection, Stepless speed regulation, Low noise, Low EMI, Long life 10000-50000hrs
特征: 双转向, 信号功能, 锁定保护, 无级调速, 低噪音, 低电磁干扰, 超长寿命 10000-50000 小时

Notice: Data in this typical specification sheet are for other certain customer. Voltage, rated torque, speed, current, power and shaft extension feature & dimension can be changed to meet customer specific requirement.

注意: 上述规格仅针对特定客户, 电压、扭矩、转速、电流、功率、输出轴的特征和尺寸等都可以按照客户的特殊要求进行调整。

Outline Drawing 外形图:

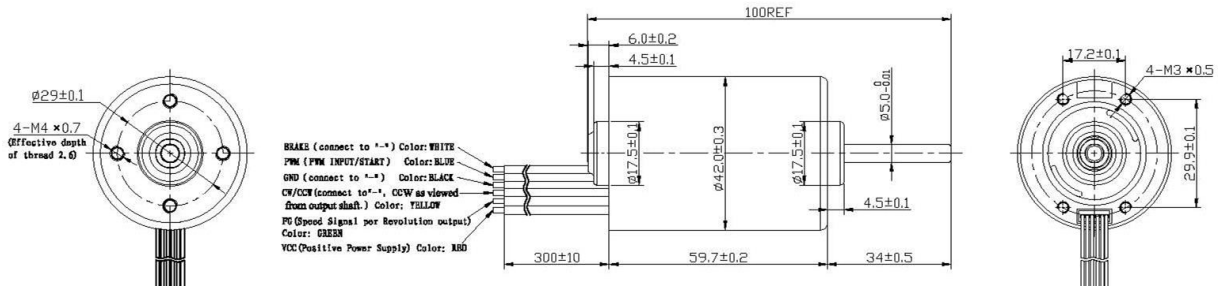

Usable machine screw length 6.0mm max from motor mounting surface

Unit: Millimeter



Performance Curve 性能曲线:

B4260M-S01

12V

B4260M-S02

24V

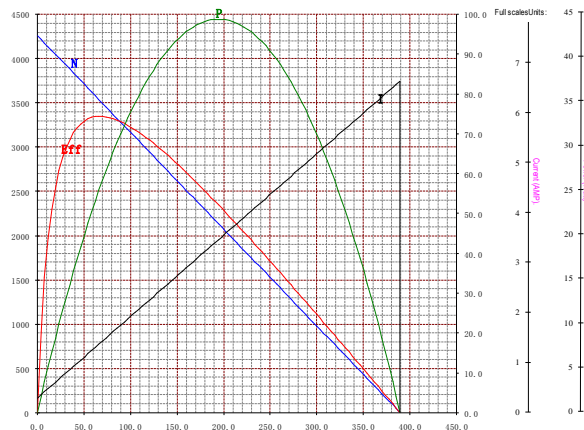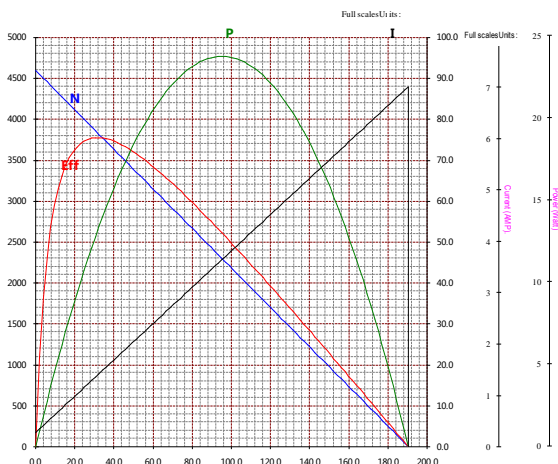

地址: 广东省深圳市宝安区福海新田大道福宁高新产业园 A 栋、F 栋

Address: Building A & F, Funing Hi-Tech Park, Xintian Road, Fuhai, BaoAn District, Shenzhen, Guangdong Province, China

电话 Tel: 86-755-29169191,29169292 传真 Fax: 86-755-29169007 邮箱 Email:sales@hengdrive.com 网址 Http://www.hengdrive.com