

B2813S	Outer Rotor	Output Power 输出功率: 10W~25W	Weight 重量: 29~40g (Approx.)
	外转子		

3-Phase Brushless DC Motor-Typical Application 三相无刷直流电机-典型应用

With Driving Controller 含驱动控制器

Home Application: Cleaner Robot, Vacuum Cleaner


家用电器: 扫地机器人, 吸尘器

Personal Care: Hair Dryer

个人护理: 吹风机

Industrial & Commercial Equipment: Small High-speed Fan

工商业器材: 小型高速风机




Model 型号	Voltage(V) 电压		No Load 空载		Rated Load 额定负载			Stall 堵转		
	Operating Range	Rated	Speed (rpm)	Current (A)	Torque (mNm)	Speed (rpm)	Current (A)	Output P. (W)	Torque (mNm)	Current (A)
B2813S-S01	8-26	14.4	31592	0.326	5.12	28030	1.419	15.029	45.415	10.021

Characteristic: CW or CCW, Signal function available, Locked rotor protection, Stepless speed regulation, Low noise, Low EMI, Long life 2000-10000hrs
特征: 单转向, 信号功能, 锁定保护, 无极调速, 低噪音, 低电磁干扰, 超长寿命 2000-10000 小时

Notice: Data in this typical specification sheet are for other certain customer. Voltage, rated torque, speed, current, power and shaft extension feature & dimension can be changed to meet customer specific requirement.

注意: 上述规格仅针对特定客户, 电压、扭矩、转速、电流、功率、输出轴的特征和尺寸等都可以按照客户的特殊要求进行调整。

Outline Drawing 外形图:

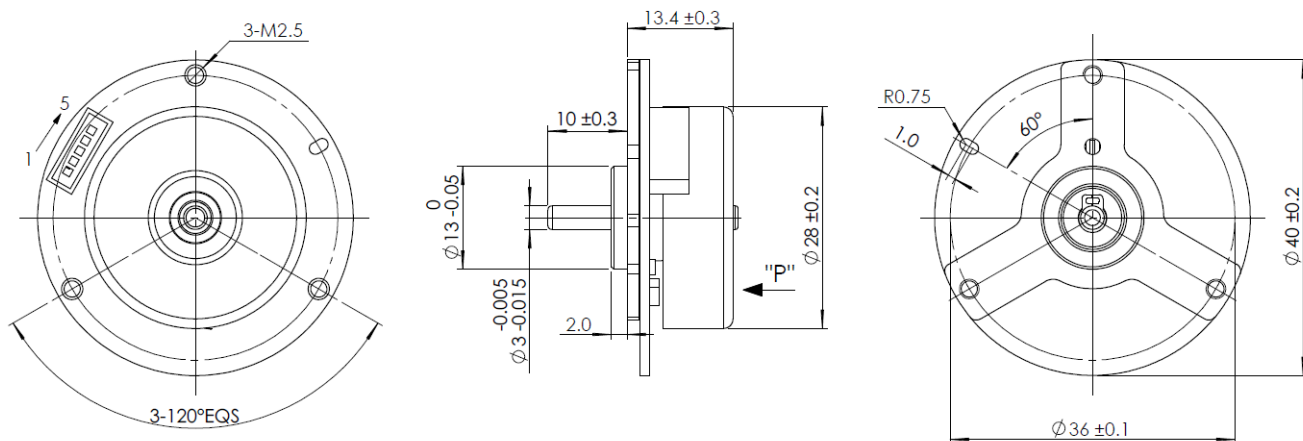


Unit: Millimeter

Performance Curve 性能曲线:

B2813S-S01

14.4V

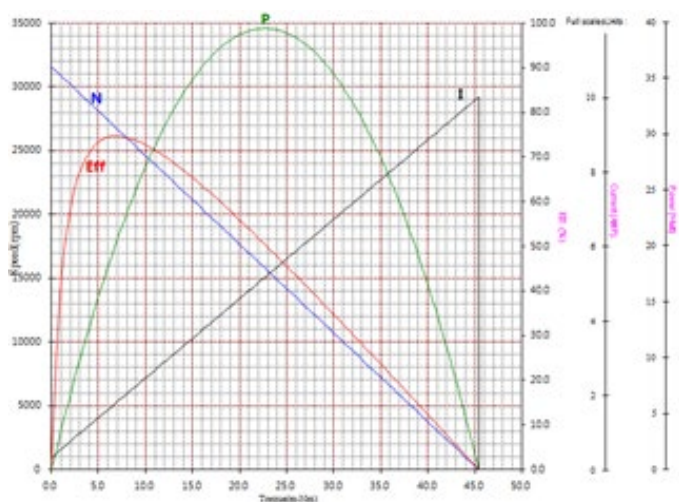

Pin1	Vcc
Pin2	GND
Pin3	PWM
Pin4	FG
Pin5	ID

地址: 广东省深圳市宝安区福海新田大道福宁高新产业园 A 栋、F 栋

Address: Building A & F, Funing Hi-Tech Park, Xintian Road, Fuhai, BaoAn District, Shenzhen, Guangdong Province, China

电话 Tel: 86-755-29169191,29169292 传真 Fax: 86-755-29169007 邮箱 Email:sales@hengdrive.com 网址 Http://www.hengdrive.com