

B3725S	Outer Rotor	Output Power 输出功率: 2W~25W	Weight 重量: 120g (Approx.)
	外转子		

Brushless DC Motor-Typical Application 直流无刷电机-典型应用

Home Application: White Goods, Small Appliance, Electric Fanner, Stirrer

家用电器: 贯流风机, 白色家电, 小家电, 电风扇, 搅拌器


Medical Apparatus: Medical Pump, Medical Stirrer, Centrifugal Machine

医疗器械: 医疗泵, 医用搅拌机, 离心机

Industry Facility: Electric Valve, Linear Actuator 工业设备: 电动阀门, 线性驱动器

Business Equipment: Printer, Copier, Projector, ATM, Vending Machine

商业设备: 打印机, 复印机, 投影机, ATM 机, 售卖机

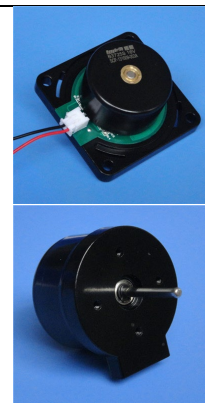


Model 型号	Voltage(V) 电压		No Load 空载		Rated Load 额定负载				Stall 堵转	
	Operating Range	Rated	Speed (rpm)	Current (A)	Torque (mNm)	Speed (rpm)	Current (A)	Output P. (W)	Torque (mNm)	Current (A)
B3725S-S01	8-26	12	3390	0.12	39.24	2120	1.30	8.73	80	2.8
B3725S-S02	8-26	16	4850	0.20	29.14	4100	1.10	12.53	78	2.8
B3725S-S03 (直驱 Direct Drive)	8-26	24	4460	0.13	42.97	3300	0.93	14.98	129	2.4

Characteristic: CW & CCW, Signal function available, Locked rotor protection, Stepless speed regulation, Low noise, Low EMI, Long life 10000-30000hrs
特征: 双转向, 信号功能, 锁定保护, 无级调速, 低噪音, 低电磁干扰, 超长寿命 10000-30000 小时

Notice: Data in this typical specification sheet are for other certain customer. Voltage, rated torque, speed, current, power and shaft extension feature & dimension can be changed to meet customer specific requirement.

注意: 上述规格仅针对特定客户, 电压、扭矩、转速、电流、功率、输出轴的特征和尺寸等都可以按照客户的特殊要求进行调整。

Outline Drawing 外形图:

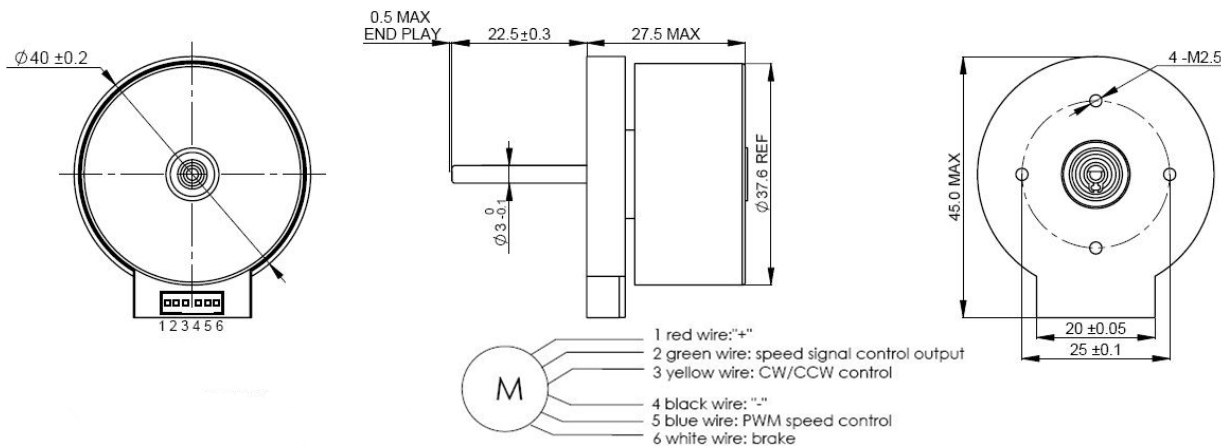


Unit: Millimeter

Performance Curve 性能曲线:


B3725S-S01

12V

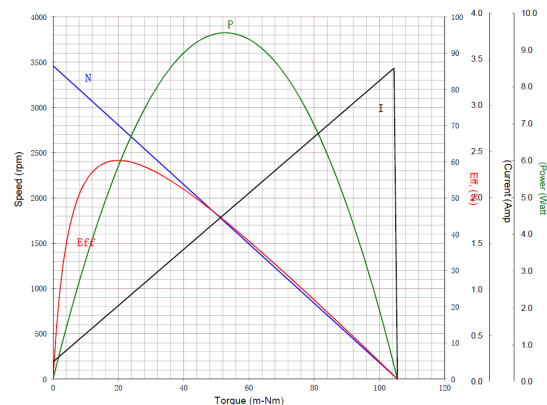

B3725S-S03

24V

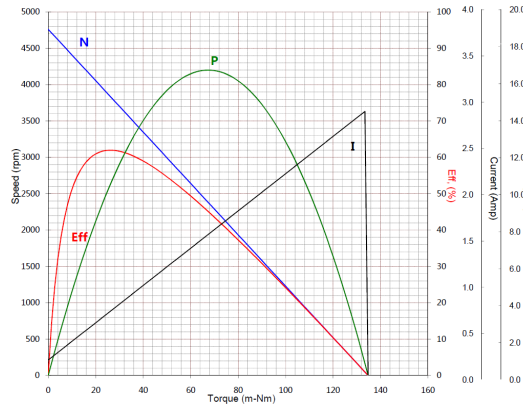

地址: 广东省深圳市宝安区福海新田大道福宁高新产业园 A 栋、F 栋

Address: Building A & F, Funing Hi-Tech Park, Xintian Road, Fuhai, BaoAn District, Shenzhen, Guangdong Province, China

电话 Tel: 86-755-29169191,29169292 传真 Fax: 86-755-29169007 邮箱 Email:sales@hengdrive.com 网址 Http://www.hengdrive.com